
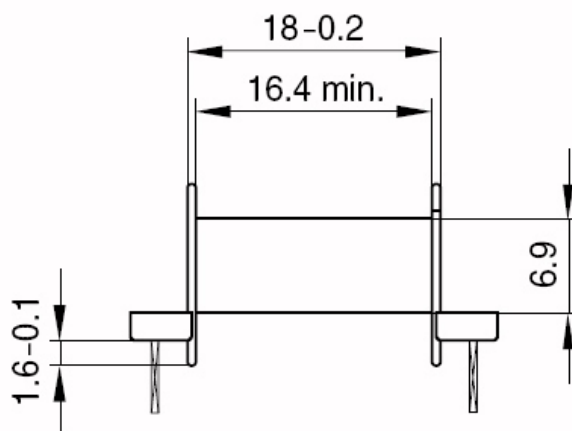


Pin 1 marking

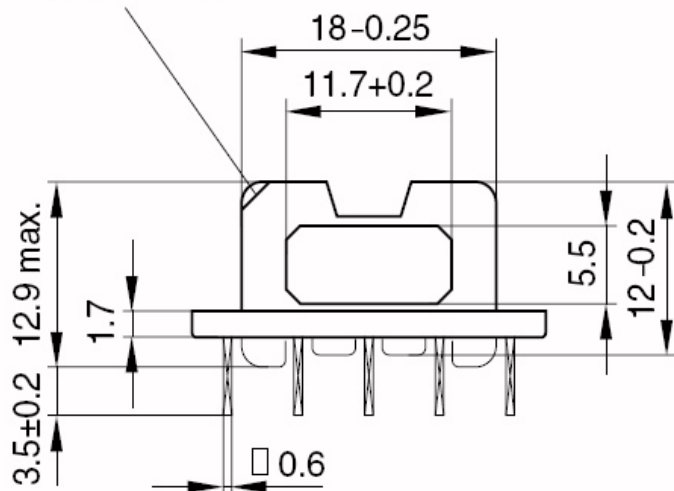

Material: GFR thermosetting plastic (UL 94 V-0, insulation class to IEC 60085:

H max. operating temperature $180 \text{ }^\circ\text{C}$), color code black

Sumikon PM 9630 @ [E41429 (M)], SUMITOMO BAKELITE CO LTD

Solderability: to IEC 60068-2-20, test Ta, method 1 (aging 3): $235 \text{ }^\circ\text{C}$, 2 s

Resistance to soldering heat: to IEC 60068-2-20, test Tb, method 1B: $350 \text{ }^\circ\text{C}$, 3.5 s