
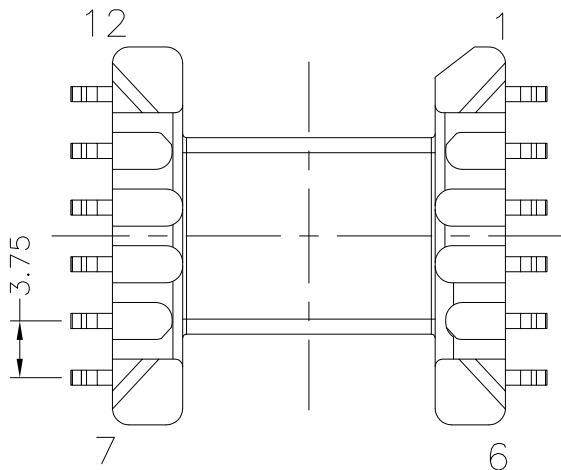
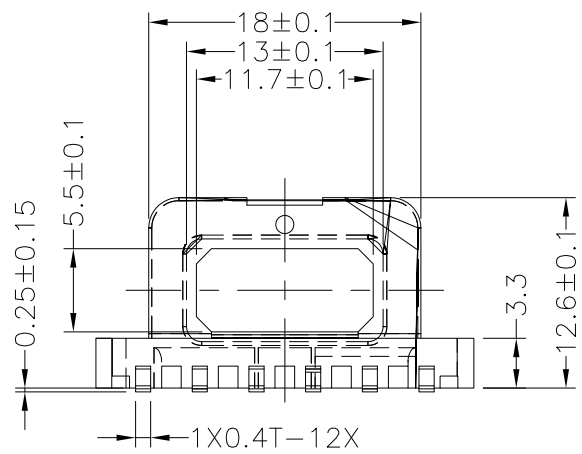
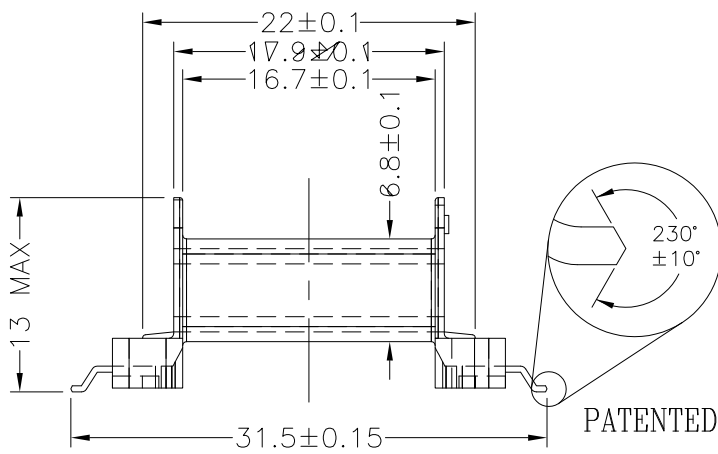
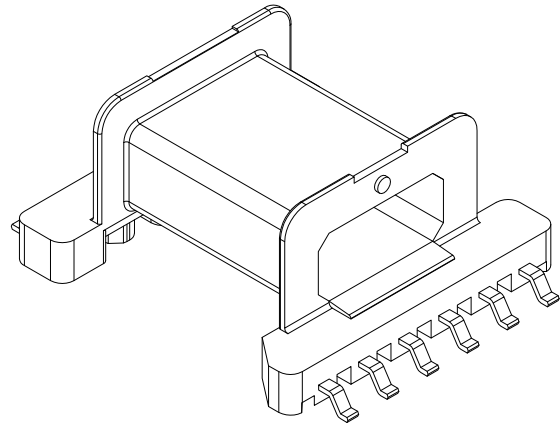


FERYSTER

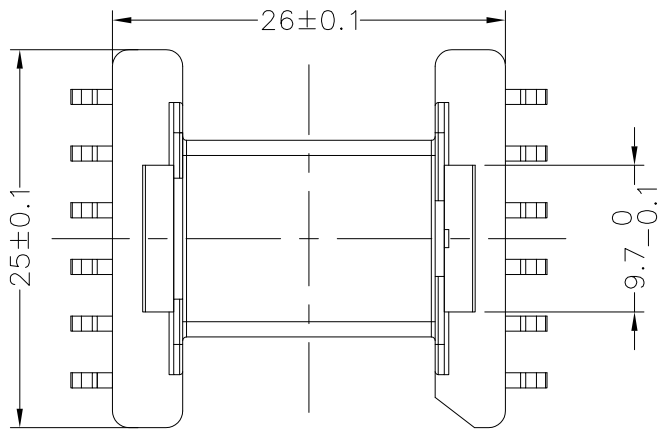

MATERIAL (BOBBIN) PM-9630 SUMITOMO UL NO. E41429(M)	UL RATING 94V-0	MATERIAL (TERMINAL) P.B	TERMINAL (PLATING) Sn
---	--------------------	----------------------------	--------------------------

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05

UNIT : m / m

SCALE 2 : 1

Finish: 1. Pb wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 4